

Wirnet™ iZeptoCell Cellular

LoRaWAN® Indoor Gateway for the Internet of Things



The “Wirnet™ iZeptoCell Cellular” is the ideal gateway to support you in your smart city, smart building or every smart project that requests dedicated indoor coverage and/or network densification, providing both a unique superior LoRa® coverage and operational excellence with embedded LTE-M backhaul.



Smart Cities



Smart Building



Smart Metering



Smart Retail



In France, Kerlink is certified ISO9001: 2015 by AFNOR certification. The Quality Management System gives high priority to Customer satisfaction and progress implementation.



Key Features

- Indoor LoRa® Gateway,
- Lifetime Guarantee,
- Supported unlicensed bands: 863-870MHz (EMEA, India), 902-928MHz (North America),
- Supported LoRaWAN® regional parameters: EU863-870, IN865-867, RU864-870, US902-928,
- 8 x 8 packets detectors, 8ch RX (125 kHz, multi Spreading Factor) + 1ch RX (250kHz or 500kHz, mono Spreading Factor) + 1ch RX (FSK) + 1ch TX,
- Backhaul : LTE CatM1 / EGPRS / GPRS worldwide connectivity with remotely configurable eUICC,
- Powered through USB-A connector using:
 - AC/DC power supply (90-264VAC/5VDC), direct mounting (included accessory),
 - USB-A extension cable (included accessory),
 - USB-A to USB-C cable (optional accessory, not included),
 - PoE/USB power splitter (optional accessory, not included),
- Highly secured device relying on a Trustzone firmware

Key Differentiators

High performance and reliability

- Our product is **made in France**,
- Semtech CoreCell Reference Design,
- Integrated LoRa and LTE antennas,
- Built-in high rejection filters,

Secure hardware and software architectures

- SecureBoot (Signed firmware),
- SecureStorage (keys and certificates in secured area) using Trusted Execution Environment solution,
- Secured links and backhaul protection (OpenVPN/IPsec),
- Reboot (watchdog) and recovery on previous Management config (or factory config if the boot issue is not fixed).

All product specifications are subject to change without notice (V3.6)

Easy deployment

- Easy installation: wall mounting by 1 oblong holes or by VELCRO® strips or by double sided adhesive tape, or direct mounting on AC/DC supply or lay on a table,
- Easy access to connectivity:
 - eSIM with LTE-M/GPRS worldwide connectivity,
 - 3 LEDs:
 - 1 LED (green/red) for Gateway status,
 - 1 LED (green/red) for Backhaul status,
 - 1 LED (green/red) for LoRa® RF activity (Uplink,Downlink),
- USB Type A connector for power supply,
- Integrated LoRa® and LTE antennas,
- Reset button,
- Remotely configurable, manageable, via intuitive Web GUI

Technical Features

- LoRa® performance:
Rx Sensitivity: -140 dBm (SF12BW125),
Tx conducted power: configurable from 5dBm to 25dBm
Maximum EIRP: 27dBm
- LTE CatM, GPRS, EGPRS module supporting:
+23dBm output power (class 3),
Bands 1, 2, 3, 5, 8, 12, 13, 18, 19 20, 25, 26, 27, 28, 66, 71, 85,
EU RED, US FCC, CA ISED, BRAZIL ANATEL, JAPAN JRF & JTBL,
CHINA CCC, Singapore INDA, Australia RCM, Taiwan NCC, Korea approvals,
- MFF2 eUICC remotely configurable,
- CPU: ARM Cortex A7 792MHz,
- DDRAM 256 MB,
- 4GB eMMC (2GB available for user)
- Power consumption: 1W nominal, 5.5W max
- Operating Temperature Range: 0°C +55°C (for gateway only, without power supply),
- Humidity: 5% to 95%,
- Size: 76 x 68.5 x 32 mm,
- Weight: 65g (gateway only); 250g (with packaging),
- Casing: IP30

Software Features

- Same Kerlink software on all i-Series (for infrastructure homogeneity and easy maintenance)
- **Dynamic web interface (On-the fly modifications),**
- **Programmable Gateway:** Toolchain, libraries and header files for compilation of in-house SW, or extra packages additions,
- **Including:**
 - Operating System: KerOS with embedded GNU/Linux based on Yocto LTS and Kernel LTS,
 - Native Language Support: Python 3, C/C++ and Shell,
 - Kerlink Common Packet Forwarder (Semtech Packet Forwarder, GWMP), Basic Station

Thanks to their expertise and experience, Kerlink teams are fully mobilized to help you develop your business and reduce your operational and commercial risks.

Don't hesitate to contact us.

Added-Value Services for all gateways

- **Access to Kerlink Wiki**

The Kerlink Wiki gives you full access to comprehensive and up-to-date documentation about the delivered solution: installation and setup instructions, configuration steps, connectivity options, etc.

The content of the wiki at the time of ordering is **the reference** and prevails in case of discrepancy.

Consult it before buying to ensure the solution fits your needs: [Click here](#)

- **Zero Touch Provisioning (ZTP) and Zero Touch Maintenance (ZTM)**

- Access to embedded Chirpstack LNS

Available Options



Maintain Program

For customers aiming to enhance their IoT network based on Kerlink gateways.

Including:

- Unlimited level 2/3 support
- Team of dedicated experts
- Response within 8 working hours
- Clear history and tracking
- Personalized support
- Access to our Wanasy Management Cockpit
 - Real-time overview of your gateway's health
 - Precise monitoring of your network's performance




Operate offer

For customers focused on their core business.

Including:

- Maintain Program
- Kerlink commitment on data air availability (SLAs)
- Network Operating Center with dedicated experts monitoring your network
- Pro-active and preventive maintenance
- Monthly reports about health of network (and recommendations)
- Dedicated Account manager

For more informations about our Maintain Program or our Operate offer, contact us: **dataprint@dataprint.fr**

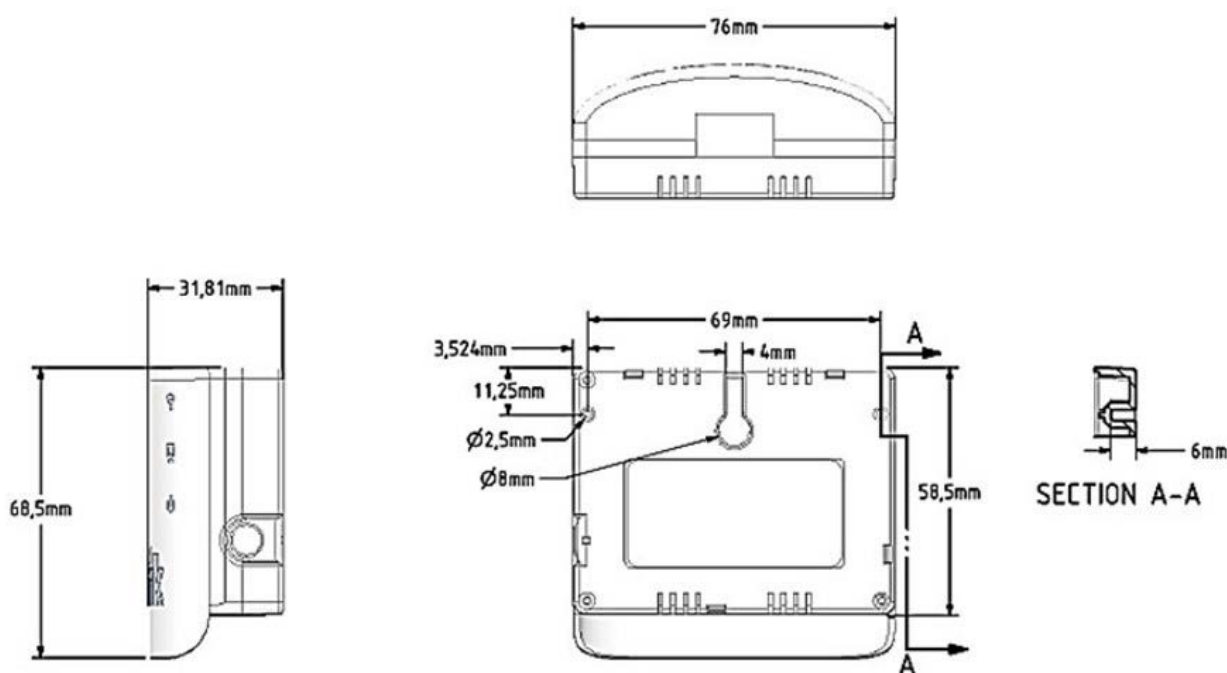

Certifications

868

- Europe (CE)

915

- USA (FCC)
- Canada (ISED)

(For any specific need, please contact us)

Product Ordering references

Wirnet™ iZeptoCell Cellular - Ordering references

Product Ordering References

Reference	Designation	Description	ISM Frequencies
PDTIOT-IZEC800	Wirnet iZeptoCell Cellular	8CH LoRa, Indoor, Cellular (LTE-M) backhaul	863-870 MHz
PDTIOT-IZEC900	Wirnet iZeptoCell Cellular	8CH LoRa, Indoor, Cellular (LTE-M) backhaul	902-928 MHz

868 and 915 Accessory Ordering References (Wirnet™ iZeptoCell)

Power connectivity	Designation	Description	Recommendation
KLK03537	2,8m USB C to USB A extension cable		Optional, not included in the box

All product specifications are subject to change without notice (V3.6)