



## Description

T-Valve is a LoRaWAN water valve used in residential or commercial buildings. 3/4" and 1" versions available.

## Product features

- Remote water supply control
- Water temperature
- Environment temperature
- Wired Flood Sensor (optional)
- Housing tampering detection
- Magnetic tampering detection
- Buttons for manual control
- LEDs for valve and device status indication
- Buzzer

## Applications

- Smart Buildings
- Smart home
- Residential buildings
- Commercial buildings
- Environment monitoring

## Device specifications

### Mechanical specifications


WEIGHT	550gr
DIMENSIONS	105x117x90,8mm
ENCLOSURE	PC/ABS; Valve PPE/PS

### Valve Specifications

VALVE TYPE	Solenoid valve
FITTINGS SIZES	DN20 or DN25
OPERATING PRESSURE	0.05MPa - 0.08MPa
MEDIA TEMPERATURE	1-75°C
VALVE RESPOND TIME	open ≤ 0.15s; close ≤ 2s

## PRESSURE/FLOWRATE RATIO

Pressure (MPa)	0,05	0,1	0,2	0,4	0,5	0,6	0,7	0,8
Flowrate (L/min)	25	55	72	115	135	150	165	180

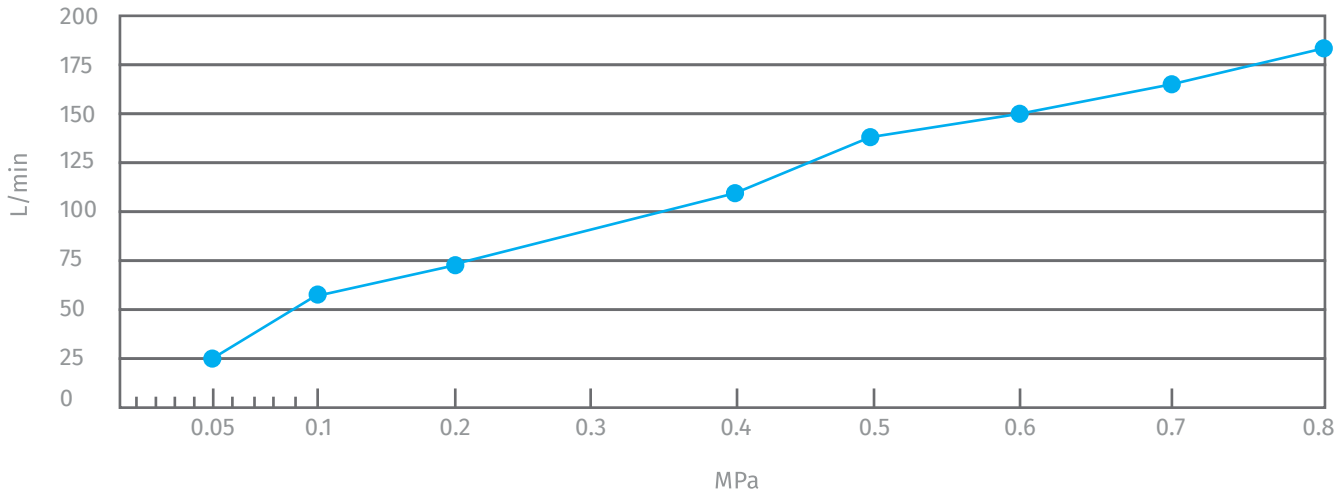

## Performance test

HIGH WATER PRESSURE CLOSING	At water pressure 0,8MPa, solenoid valve can be closed normally
LOW WATER PRESSURE CLOSING	At water pressure 0,05MPa solenoid valve can be closed manually
LEAKAGE UPON HIGH WATER	1,2Mpa zero leakage
LEAKAGE UPON LOW WATER	0,05MPa ≤ 0,1mL/min

## SEALING TEST (STATIC PRESSURE)

### COLD WATER

High pressure 1,2MPa

Low pressure 0,02MPa

### HOT WATER

High pressure 0,8MPa

Low pressure 0,02MPa

Service life ≥ 1,000,000 cycles

## Operating conditions

TEMPERATURE	0-60°C
HUMIDITY	35%-90% RH (non-condensing)
PERMISSIBLE LIMITING WATER	≤ 1,2MPa

## Storage conditions

STORAGE TEMPERATURE	-5-+80°C (no freezing state)
STORAGE HUMIDITY	25%-95% RH (non-condensing)

## Operating conditions

TEMPERATURE	0-60°C
HUMIDITY	35%-90% RH (non-condensing)

## Power supply

<b>BATTERY TYPE</b>	LiSOCL2 ER26500 3.6V 9000mAh
<b>OPERATING VOLTAGE</b>	3.6VDC
<b>EXPECTED BATTERY LIFE</b>	Up to 10 years (depending on configuration and environment)
<b>EXTERNAL POWER SUPPLY</b>	Optional

## Radio/Wireless

<b>WIRELESS TECHNOLOGY</b>	LoRaWAN® 1.0.1
<b>WIRELESS SECURITY</b>	LoRaWAN® End-to-End encryption (AES-CTR)
<b>LORAWAN DEVICE TYPE</b>	Class A End-device
<b>SUPPORTED LORAWAN FEATURES</b>	OTAA, ADR, Adaptive Channels setup
<b>SUPPORTED LORAWAN REGIONS</b>	EU863 – 870; Other LoRaWAN regional settings available upon request
<b>LINK BUDGET</b>	130dB
<b>RF TRANSMIT POWER</b>	14dB

## Conformity

<b>CE</b>	2014/35/EU Low Voltage Directive 2014/30/EU EMC Directive Radio Equipment Directive (RED)	EN 60950-1:2006/ A11:2009 / A1:2010 / A12:2011 / A2:2013 EN 301489-1 V2.1.1; EN 301489-3 V2.1.1 EN 300220-1 V3.1.1; EN 300220-2 V3.1.1
-----------	---	--

## ROHS

<b>DRINKING WATER CERTIFICATION</b>	ACS KTW NSF/ANSI/CAN NSF/ANSI USA California Health and Safety Code 11687 USA S.3874 – 111th Congress (2009-2010)	CARSO - L. S. E. H. L. File reference 17 ACC LY 591  61-2018, Drinking water system components - Health Effects 372-2016, Drinking water system component - Lead content Reduction of Lead in Drinking Water Act Reduction of Lead in Drinking Water Act
-------------------------------------	--	---

## Communication protocol

<b>UPLINK/DOWNLINK AVAILABLE REQUESTS</b>	Open/Close Valve Reduced access mode configuration Temperature water Temperature environment Configure keepalive period Enable/Disable flood sensor Request full device information in next transmission Flood detection status Flood detection wire status (functional or cut/broken) Box tampering status Magnetic tampering status Hardware/Firmware version Battery voltage LEDs control Buzzer control	E.g. open the valve for 10 minutes every 50 minutes                    Configurable modes and duration Configurable modes and duration
---	---	---

## Sensors

### Temperature

---

RESOLUTION 0,1°C

ACCURACY  $\pm 1^\circ\text{C}$

---

### Wired flood sensor

---

FEATURES Two-wire connection  
Short-circuit detection  
Missing sensor detection

---

### Magnetic tampering sensor

---

### Plastic enclosure open/close sensor

---