



## About the MultiTech CT300

MultiTech CT300 (MTCT300) is a wireless and self-powered electrical current monitoring device. It is capable of reporting average, peak, and minimum RMS Amperes and tracking accumulated Amp-Hours. The device parasitically harvests energy from the monitored conductor, negating the need for routine maintenance to replace or charge batteries.

MTCT300 uses sub-gigahertz LoRaWAN for long range wireless communications. This IoT interface can be deployed as a private network, or used with an available public one. The use of short data messages increases reliability of transmission in suboptimal environments such as metal electrical panels.



The MTCT300 uses a split-core current transformer to allow easy installation on existing wiring.

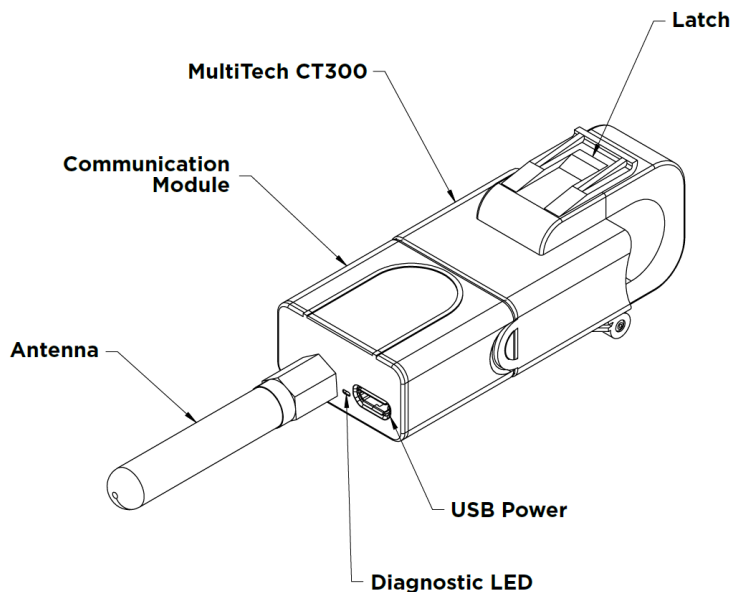

## Ordering Options

Ordering Part Number	Description	Region
MTCT300-NA-1	Industrial wireless 300A current transformer for energy monitoring – 1 Pk	Canada
MTCT300-NA-10	Industrial wireless 300A current transformer for energy monitoring – 10 Pk	United States
MTCT300-EU-1	Industrial wireless 300A current transformer for energy monitoring – 1 Pk	European Union
MTCT300-EU-10	Industrial wireless 300A current transformer for energy monitoring – 10 Pk	United Kingdom

## Specifications

Category	Description
<b>Operational Characteristics</b>	
Voltage	85 to 480 VAC
Power Consumption	0.7 W <sup>1</sup>
Frequency	47 to 63 Hz
Temperature Range	-25 to 70 °C
Humidity	Typical: < 60% RH
	Max: 80% RH

<sup>1</sup> Maximum power consumption at full rated current of transformer. Primary Voltage Drop: 2.33mV, Equivalent Resistance: 8μΩ.

Category	Description
Pollution Degree	2
Operational Altitude	2000m
<b>Mechanical Characteristics</b>	
Weight	2.3 oz (65 g)
IP Degree of Protection	IP51 (indoors)
Window Dimensions (L×W)	0.6" × 0.6" (16 × 16 mm)
Exterior Dimensions (L×W×D)	3.2" × 1.25" × 0.6" (82 × 32 × 16mm)
Mounting	Wire-Hang
<b>Communications</b>	
Wireless Interface	800-900 MHz LoRaWAN
LoRaWAN Specification	1.0.2 RevB
Frequency Bands	US915/EU868
LoRaWAN Device Class	Class A
Transmit Power	+20 dBm
Receive Sensitivity	-137 dBm
<b>Certifications</b>	
UL/CSA	UL 508, CSA C22.2 #14-18
FCC ID	2APCG-VUHDC1
RoHS	Compliant
<b>Warranty</b>	
Warranty	One year from date of purchase. <b>Note:</b> Repair is by the manufacturer only. Opening MTCT300 voids the warranty.

## Contact Information

General Information	<a href="mailto:info@multitech.com">info@multitech.com</a> <a href="https://multitech.com/contact-us/">https://multitech.com/contact-us/</a>
Sales	+1 (763) 785-3500 <a href="mailto:sales@multitech.com">sales@multitech.com</a>
Technical Support Portal	+1 (763) 717-5863 <a href="https://support.multitech.com">https://support.multitech.com</a>
Website	<a href="http://www.multitech.com">www.multitech.com</a>
World Headquarters	2205 Woodale Drive Mounds View, MN 55112 USA